



- Perfect heat & pressure distribution
- Single electromagnetic plate of 40x50 cm (Eclam 50 Auto only)

- Optimized dimensions
- Robust frame
- Suitable for laser transfer applications, sublimation on textile and textile transfer
- Ideal for small productions

- Manufactured in France

- 2-year guarantee on the machine
- 10-year guarantee on heating element



Set programs



Pre-heat time




Electromagnetic
(AUTO version)


OPTIONAL ACCESSORIES



Support table




DTG plate




Set of 4 plates




Handle



Teflon Sheet



Nomex® cover



Shoe plate


TECHNICAL CHARACTERISTICS

Type	Manual (ECLAM 50 REL) Electromagnetic (ECLAM 50 AUTO)
Operation	Clam - Clamshell opening
Platen size	40x50 cm / 16x20 "
Max thickness	14 mm
Weight	44 Kg / 97 lbs
Pressure	300 gr/cm ²
°C / °F Max	220 °C / 429 °F
Power	2500 W
Power supply	240 V Single-phase
Amperage	11 A
Applications	Flex, Direct to Garment, Pretreatment, Textile Sublimation, Laser Transfer, Screen Printing
Dimensions	857x742x455 mm 33x29x18 "


OPTIONAL ACCESSORIES



TAB-98 LITE
Support table




PLA-DRY M
Sponge plate to dry pretreated clothes.




PLA-SET
Set of 4 plates
12 x 8 cm, 15 x 15 cm,
12 x 45 cm, 25 x 30 cm.



HAND-ECLAM
Accessory to help manipulating the plate.




PLA-SHOES-CV
Special plate that fits textile and sport shoes (side and back).



HOU-50
Heat resistant Nomex® cover for easier threading and protection.

SETTINGS

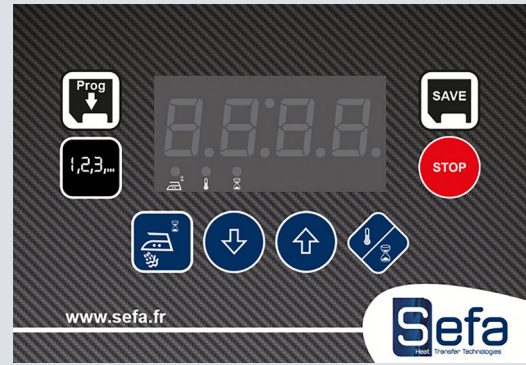

Electronics developed by Sefa

Accurate and fast regulation (PID control) for a wide range of heat transfer products : Flex, flock, sublimation, screen printing transfer.

Double timer (main + pre-heat)

2 cycle counters

3 settable programs



Stop cycle function

From 0 to 570 sec (precision +/- 1%).

From 0 to 220°C (precision +/- 1%).

Heating time to reach 180°C : 15 min.

DIMENSIONS

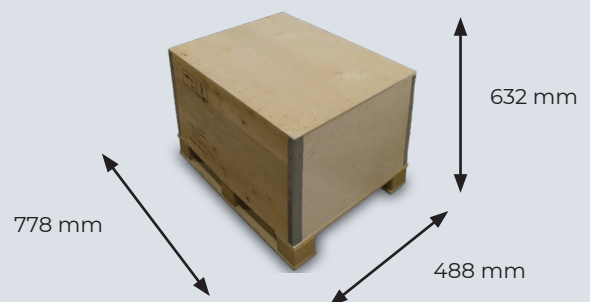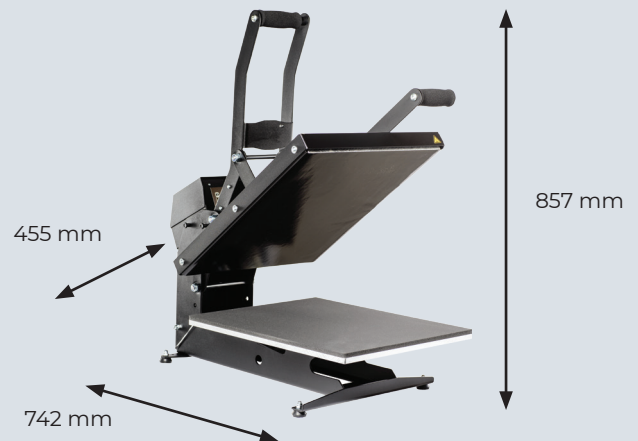

Box weight CAI-NO3 : 12 kg